

ADESIVO FINALE - FINAL ADHESIVE

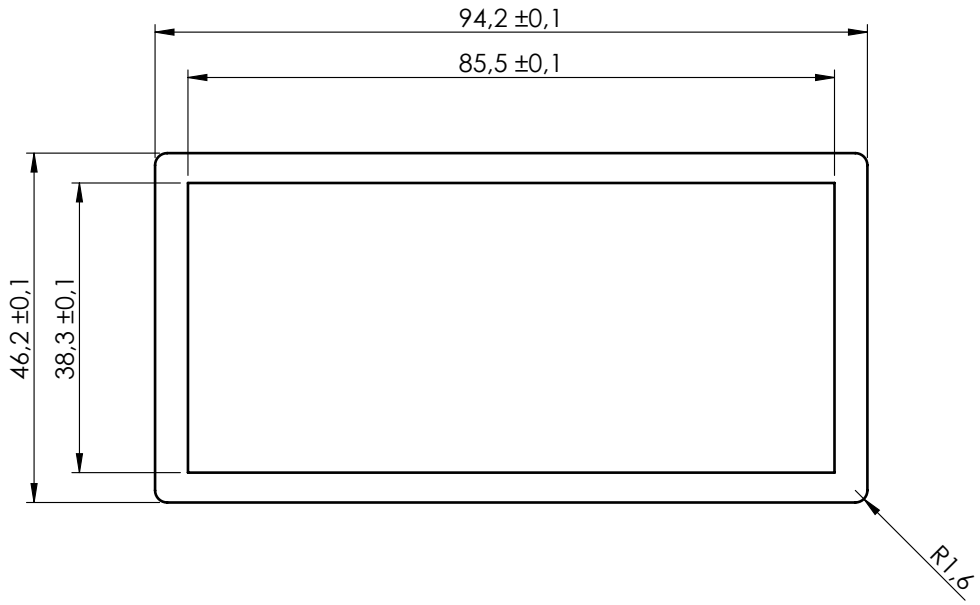

ADESIVO FUSTELLATO - ADHESIVE DIE-CUT

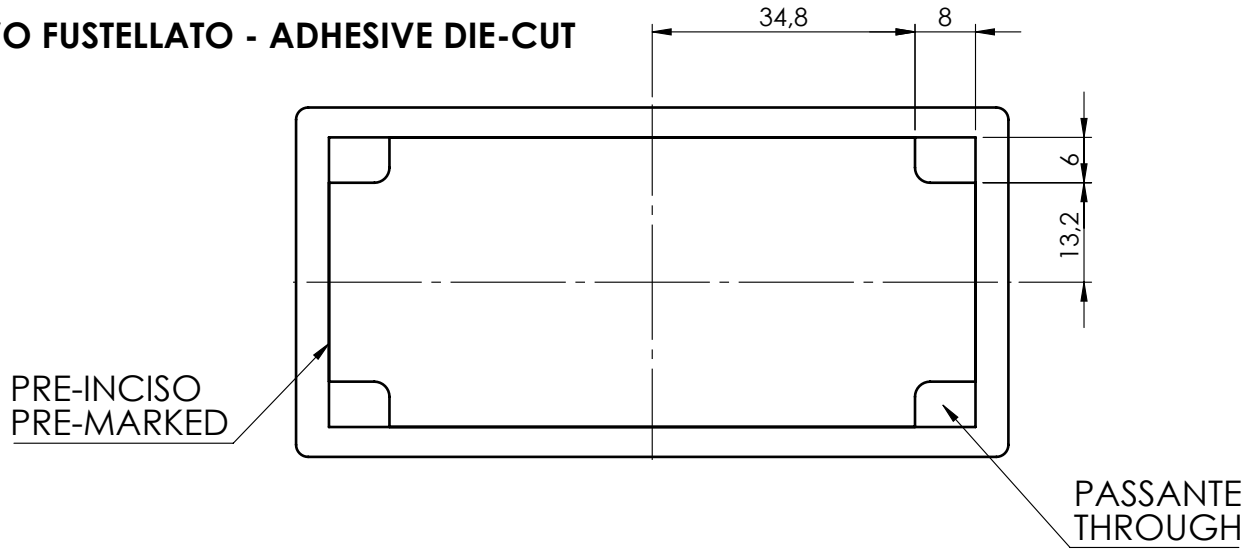

Si sconsiglia l' applicazione del nastro su materiali al di sotto dei 15°C poiche l'adesivo diventa troppo rigido per aderire adeguatamente. Una volta applicato nelle condizioni suggerite, il nastro resiste bene anche alle basse temperature.
We do not recommend tape application to surfaces at below 15°C because the adhesive becomes too firm to adhere readily. Once applied in the suggested conditions, the tape resists well even at low temperatures.

Datasheet:
Brand: 3M
Denomination: VHB 9473 PC Transparent
Adhesive system: Acrylic modified
Thickness: 250 µmm
Liner: Poly Coated Tan Paper white with brand 3M VHB green
Application Techniques: from 21° to 38° C
thoroughly clean the surfaces before applying.

General Tolerance UNI EN 22768/1 Media (m)						Sheet:
from 0.5 to 3 ± 0.1		from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	1
Scale: 1:1	IM: --	Drawed: M.S.	Checked: R.N.	Date: 21/11/2023	Material: Adhesive	Process:
Dimension in mm		The present drawing cannot be reproduced or comunicated to 3d parties, even partially, without the authorization of ITALTRONIC Srl. Italtronic reserves to protect its own rights according to the law.	Replaces the: I-05003-01	Derived from: --	Weight: 3.23 gr	Cod. Mold: --
italtronic enclosures for electronics italtronic.com			Description: ADESIVO INCABOX 48X96 XTS BIADHESIVE INCABOX 48X96 XTS			
			Drawing nr.: **2_190_00036**			Rev.: - A4